

Towards Autonomous Driving: Design of Smart Damper – Energy Harvester

Andrius Dzedzickis, Tadas Lenkutis, Mantas Makulavičius, Vytautas Bučinskas,
Inga Morkvėnaitė-Vilkončienė

Vilnius Gediminas Technical University, J. Basanaviciaus str. 28, Vilnius, Lithuania

Abstract: Majority of modern cars are equipped with standard suspension systems with hydraulic shock absorbers. They are reliable elements, but came to the limit of their possibilities to ensure reasonable level of vibration accelerations, when cars became lighter and diameters of the wheel rim and tires has big diameter. This paper provides possible solution for the modern car suspension systems with controlled damping and self-powering service and data transmission. Such dampers implements smart liquid and electrically realized damping force control. This paper focused on electrical properties of this type of shock absorbers. Provided experimental research use shock absorber – energy harvester of new design. All experiments performed on shock machine using produced by authors prototype of original design. Energy gaining performed using three similar prototypes with ferro-nanomagnetic liquid, permanent magnet core and ferromagnetic steel core. Obtained results provided in the graphical form as electric gain with open circuit and loaded by electric load.

Keywords: damping, vibration control, energy harvesting, mechatronic systems

1. Introduction

Recent development process of the automotive vehicles covers all areas of the technology – from powertrain to materials and body design. Decreasing weight of the car and increasing diameters of tires and wheel rims contradicts to requirement of vibration level diminishing in the car body due to worsening coefficient of weighted mass. Solution of these problems lays in increasing quality of suspension of the vehicle, which is related to the vibration damping process. Classical design of shock absorbers faces modernization, which includes all kind of damping force correction from vibration velocity and acceleration values. Usually such modernization leads to the increase of components, which makes these solutions expensive and increase failure probability. Mostly known modernization methods uses electrically or mechanically driven pass valves in the hydraulic system of shock absorber [1]. Number, position and design of these valves in hydraulic systems affects damping law and therefore continues to implement [2, 3]. Alternative

efficient solutions in high comfort car are active damping systems [4], which ensures high comfort, but consumes external energy and causes frequent technological faults [5].

Development of suspension systems led by high number of scientific researches focused on improvements of damping characteristics, selection of used materials, creation of dampers with controllable damping characteristics [6] in real time and design of dampers with mechanical energy convert to electrical [7–10]. These entire improvements suit well for traditional cars but not sufficient for autonomous driving. In case of autonomous driving, not only to desire level of driving comfort has to be ensured but it also requires evaluation of some safety features, for example, vibration level when car moves on road surfaces with various roughness. Road surface roughness could be evaluated by implementing cameras or force/acceleration sensors in the vehicle suspension. The weakness of this approach cover by need of huge data processing power and remains dependent on road/weather conditions due to pollution of optical system of the cameras [11].

Another approach to solve this technical issue is to develop dampers, which can perform two functions simultaneously: a damper with controllable characteristics and road surface roughness sensor.

All roads can be characterized according ISO 8608 (Mechanical vibration – Road surface profiles – reporting of measured data), that categorize road roughness to classes from A to H. Road roughness define driving speed as well as comfort level inside vehicle, which requires to react suspension dampers by changing damping characteristics.

Autor korespondujący:

Vytautas Bučinskas, vytautas.bucinskas@vgtu.lt

Artykuł recenzowany

nadesłany 14.10.2019 r., przyjęty do druku 26.11.2019 r.



Zezwala się na korzystanie z artykułu na warunkach licencji Creative Commons Uznanie autorstwa 3.0

This idea can be implemented using mechatronic damping system with ability to recognize road category and set required damping characteristics and to inform driving computer or human driver about velocity regime [12, 13]. Proposed damper – energy harvester with ferro-nanomagnetic fluid will have possibility to control its damping characteristics and at same time it will work as a sensor, which provides information about roughness off road surface. Moreover, this approach will allow to harvest electrical energy from vibrations and convert it to electrical energy. Mathematical evaluation of this approach and evaluation of mechanical energy which be harvested from suspension system is provided in our previous report [14].

This paper intended to present results of experimental research of our damper prototype focused on its energy harvesting.

2. Experimental research

2.1. Design of smart damper – energy harvester

New designed smart damper – energy harvester realizes three main functions: (a) controlling of damping ratio; (b) measuring of road surface roughness; (c) harvesting vibration energy.

The structure of the smart damper presented in the Figure 1. This prototype is designed to operate in environment, where vibrations are relative and there are two bodies with relative displacements. It consists from frame 1, which is made of magnetic-neutral material and can be attached to the moving body by a fixing eye 6. Frame 1 is a tube which acts as cylinder and contains ferromagnetic liquid 5. Piston stem 3 is attached to the piston 4. Piston stem 3 can move along its axis and therefore can be attached to car body similar as traditional shock absorber. In order to keep proper liquid position within piston, in the other end of cylinder there are installed piston 8 and compensating spring 7. Two magnetic sources attached to the top and bottom of piston 4 could be realized as permanent magnets or electromagnets. These magnets create magnetic field media, which shaped by magnetic liquid placed in the gaps of the piston 4. When force applied to the piston stem 3, piston 4 moves along frame 1 and thus alternate magnetic field passes through the solenoid coils 2, where electric current generated.

Behavior of ferro-nanomagnetic fluid as magnetic core in the linear generator, by our best knowledge, not researched widely;

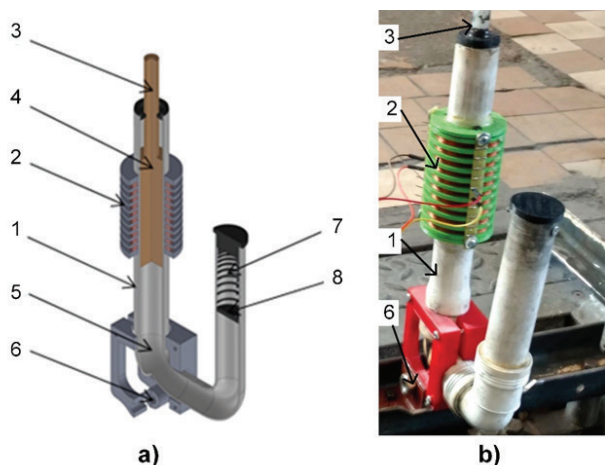


Fig. 1. Structure of shock absorber: a) 3D model cross-section view, b) view of produced prototype: 1 – frame; 2 – solenoid coil; 3 – piston stem for force application; 4 – piston; 5 – Ferro-nanomagnetic fluid; 6 – fixing eye; 7 – compensating spring; 8 – air piston

Rys. 1. Struktura amortyzatora: a) widok przekroju modelu 3D, b) widok wyprodukowanego prototypu: 1 – rama; 2 – cewka elektromagnesu; 3 – trzon tłoka do przyłożenia siły; 4 – tłok; 5 – płyn ferro-nanomagnetyczny; 6 – mocowanie oka; 7 – sprężyna kompensacyjna; 8 – tłok pneumatyczny

therefore, we build three prototypes of such shock absorber with different inner piston materials as core of generator. There were used as test core: i) permanent magnets with known magnetic flux value; ii) magnetically soft steel core with negative pattern of metal/gaps, in order to model used liquid configuration; iii) liquid core with ferro-nanomagnetic fluid. In all cases piston was designed as cylinder from parallel plastic cylinders with different material inserts between them. In case when permanent magnets were used, fluctuations of magnetic field were caused by oscillations of permanent magnets in respect of stationary coils. In case when magnetic steel, only two permanent magnets were used, they were placed on the top and bottom of piston and inserts of steel were used to transmit electromagnetic flux. Piston with ferromagnetic fluid had same configuration but instead of steel, fluid was used as media to transmit magnetic flux. These different designs allow us to create different distributions and concentrations of magnetic flux in respect of stationary mounted coils.

These three prototypes let us decide about efficiency of our prototypes for energy harvesting and determine liquid magnetic properties in the range of implemented frequencies. These results further will be used for magnetic chain optimization of the damper – energy harvester.

2.2. Experimental setup

Experimental research built in the laboratory of Department of Mechatronics, robotics and digital manufacturing and tested in the laboratory of Automotive transport, using our produced test rig, which is shown in Fig. 2.

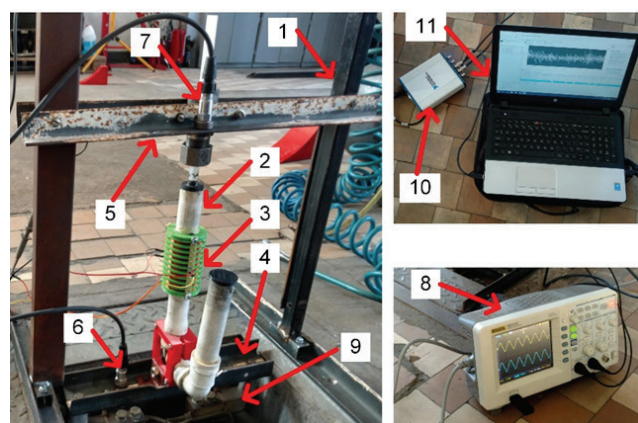


Fig. 2. Experiment stand: 1 – frame; 2 – damper; 3 – solenoid coil; 4 – down transverse beam; 5 – top transverse beam; 6 and 7 – accelerometers; 8 – oscilloscope; 9 – shaker of automotive suspension; 10 – data storage device; 11 – computer

Rys. 2. Stanowisko eksperymentalne: 1 – ramka; 2 – przepustnica; 3 – cewka elektromagnesu; 4 – belka poprzeczna skierowana w dół; 5 – górna belka poprzeczna; 6 i 7 – akcelerometry; 8 – oscyloskop; 9 – wytrząsarka zawieszona samochodowego; 10 – urządzenie do przechowywania danych; 11 – komputer

Test rig consist of the frame (1) which was tightly attached to the firm ground. Prototype of the damper – energy harvester (2) was fixed to the upper (4) and lower (5) traverse beams. Upper beam (5) tightly attached to the frame (1), lower beam (4) installed on the shaker of automotive suspension (9). When shaker is activated, lower transverse beam to which damper is attached performs reciprocating movement. Same movement is transmitted to the piston which together with ferro-nanomagnetic fluid passes through the coils (3) where electric power is generated. Output terminals of the coils are connected to the oscilloscope (8), which provides measurements of generated voltage. A hydraulic shaker was used as generator of oscillations, which can generate oscillations with stroke up to 6 mm under the frequency 24 Hz and payload up to 800 kg. Vibration level

of lower and upper transverse beams measured by two accelerometers (6, 7) Ini 603C01 (PCB Piezotronics, Depew, USA). Signals from accelerometers registered using data acquisition system USB-4432 (10) (National instruments, Austin, USA) and personal computer (11). All data analysis performed using NI software LabVIEW.

Using described setup, the possibilities of energy harvesting and road roughness sensing were evaluated, using all three prototypes of smart dampers.

2.3. Research methodology

Experimental research performed measuring voltage generated by the prototype then lower transverse beam (Fig. 2) oscillates with 6 mm stroke on the frequency of 24 Hz simulating harmonic kinematic excitation from the road roughness.

Firstly, the efficiency of separate coils of all three prototypes were evaluated. For this purpose, induced voltage on open circuit conditions in each coil was measured using multimeter DT30B.

Secondly, on the same excitation conditions time – voltage dependencies were registered when 100 Ω electrical load is applied to the circuit. These dependencies allowed to evaluate amount of harvested energy and at the same time shows possibilities to use damper – energy harvester as a road roughness sensor.

Final experiments were performed using prototype with ferro-nanomagnetic fluid. In this case were performed voltage measurements on the open circuit and on the circuit with 10 Ω electrical load. Simultaneously vibration level was measured on the input (piston stem Fig. 1) and output (fixing eye Fig. 1) of the damper. All obtained and processed results presented in the following part of the report.

2.4. Results and discussion

In the beginning, induced voltage on the coil measured on open circuit conditions. This measure shows RMS of the voltage on the separate coils (Fig. 3).

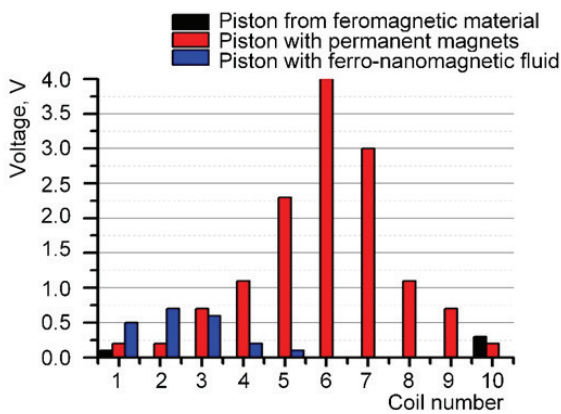


Fig. 3. Generated voltage on the coil (open circuit) with three prototypes
Rys. 3. Generowane napięcie na cewce (obwód otwarty) z trzema prototypami

From (Fig. 3) it is seen that on open circuit conditions highest voltage is generated using permanent magnets, but damper with ferro-nanomagnetic fluid also shows sufficient results to use damper as road roughness sensor.

Time vs. induced voltage dependence on one coil using all prototypes provided in the Fig. 4. From time vs. voltage curves, it is seen that highest amount of energy is generated using piston with permanent magnets; prototype with ferro-nanomagnetic fluid generates approximately 30% less power.

Further the results of vibration level and induced voltage measured in adjacent coils at open circuit conditions is provided (Fig 5).

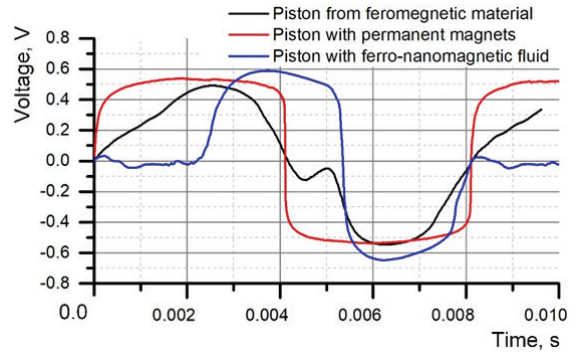


Fig. 4. Induced voltage on the coil with different material in the piston under electric load
Rys. 4. Napięcie indukowane na cewce z różnym materiałem w tłoku pod obciążeniem elektrycznym

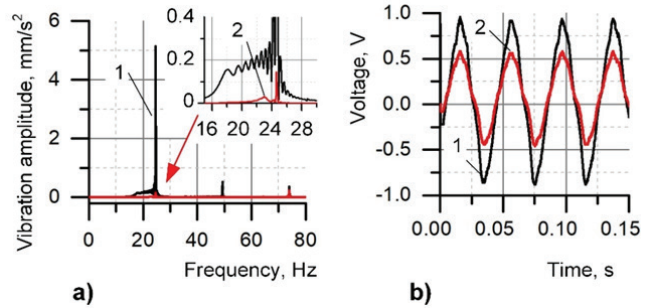


Fig. 5. Characteristics of prototype of smart damper – energy harvester: a) Amplitude-frequency characteristics measured on damper holder's (Fig. 2) at open electrical circuit. 1) vibrations on down transverse beam; 2) vibrations on top transverse beam, b) The voltage generated by the damper at an open electrical circuit in adjacent coils (Fig. 3), 1) second coil 2) third coil

Rys. 5. Charakterystyka prototypu inteligentnego tłumika: a) Charakterystyka amplituda-częstotliwość zmierzona na uchwycie amortyzatora (rys. 2) przy otwartym obwodzie elektrycznym. 1) drgania dolnej belki poprzecznej; 2) drgania górnej belki poprzecznej. b) Napięcie wytwarzane przez przepustnicę w otwartym obwodzie elektrycznym w sąsiednich cewkach (rys. 3), 1) druga cewka 2) trzecia cewka

The results of measuring vibration level and induced voltage in adjacent coils then electric circuit is loaded by 10 Ω electrical load is provided in Fig. 6.

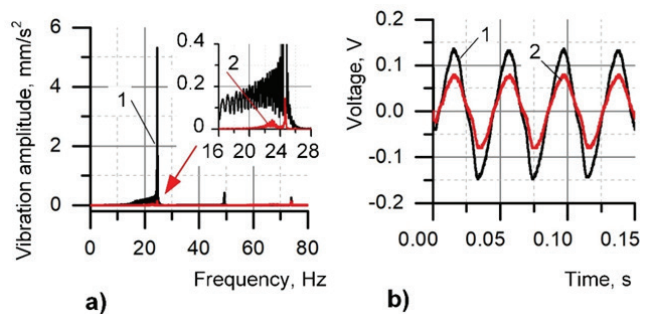


Fig. 6. Characteristics of prototype of smart damper – energy harvester when electric circuit loaded by 10 Ω electric load: a) Amplitude-frequency characteristics measured on damper holder's (Fig. 2) at open electrical circuit. 1) vibrations on down transverse beam; 2) vibrations on top transverse beam. b) The voltage generated by the damper at an open electrical circuit in adjacent coils (Fig. 3). 1) second coil 2) third coil

Rys. 6. Charakterystyka prototypu inteligentnego amortyzatora przy obciążeniu elektrycznym 10 Ω: a) Charakterystyka amplituda-częstotliwość zmierzona na uchwycie przepustnicy (rys. 2) przy otwartym obwodzie elektrycznym: 1) drgania dolnej belki poprzecznej; 2) drgania górnej belki poprzecznej; b) Napięcie generowane przez przepustnicę w otwartym obwodzie elektrycznym w sąsiednich cewkach (rys. 3). 1) druga cewka 2) trzecia cewka

Comparing Fig. 5 and Fig 6 it is noticeable that damping characteristics depends on the load of electric circuit. In case then circuit was loaded (Fig. 6.a), damping force was increased and more power of vibrations were transmitted from lower transverse beam to the upper one (Fig. 2). Also, from figures 5 and 6 it is seen that curve shape of measured voltage corresponds to the parameters of the harmonic excitation. Even taking into account that in this case generated voltages were quite low (1V on open circuit, 0.15 V on 10 Ω loaded circuit) obtained results confirms the initial idea that damper with ferro-nanomagnetic fluid can operate as damper-energy harvester and road roughness sensor simultaneously.

3. Conclusions

Performed experimental research of prototypes evidently showed possibility to use ferro-nanomagnetic fluid as magnetic core of the shock absorber – energy harvester with lower efficiency than permanent magnets, but higher than magnetically soft steel. Loss of efficiency of fluid system due to material change using 6 mm stroke and 24 Hz frequency was about 20% comparing to the case with permanent magnets. Even if testing program is ongoing, optimization of magnetic circuit is possible.

Damping force for this prototype is far not enough for real damping due to not sufficient electric efficiency, but force is noticeable even now and decrease of 0.1 mm/s² is recorded at 20 Hz mode. This design of prototype [15] is suitable to use in hydraulic damping, it means that it is possible to use this prototype inside shock absorber in the low frequency ranges even with inefficient electric power generation and therefore low damping efficiency from power harvesting.

Acknowledgment

The research was supported by ECSEL Joint Undertaking under the project No T0709T627 Autodrive (Advancing fail-aware, fail-safe, and fail-operational electronic components, systems, and architectures for fully automated driving to make future mobility safer, affordable, and end-user acceptable).

Bibliography

- Ahmed, M. R., Yusoff, A. R., & Romlay, F. R. M. Adjustable Valve Semi-Active Suspension System for Passenger Car. *International Journal of Automotive and Mechanical Engineering*, 16(2), 6470-6481. (2019).
- Chacón, J. L., Boada, B. L., Boada, M. J. L., & Díaz, V. Experimental study and analytical model of bleed valve orifice influence of a high-performance shock absorber on vehicle dynamics. *Advances in Mechanical Engineering*, 9(9), (2017).
- Bhuyan, D., & Kumar, K. 3D CAD modelling and computational fluid analysis of piston valve of twin tube shock absorbers. *Materials Today: Proceedings*, 4(8), 7420-7425. (2017).
- Collette, C., & Preumont, A. High frequency energy transfer in semi-active suspension. *Journal of Sound and Vibration*, 329(22), 4604-4616. (2010)
- Fischer, D., & Isermann, R. Mechatronic semi-active and active vehicle suspensions. *Control engineering practice*, 12(11), 1353-1367. (2004).
- Lajqi, Sh., Peahan, S. Designs and Optimizations of Active and Semi-Active Non-linear Suspension Systems for a Terrain Vehicle. *Journal of Mechanical Engineering*, 12(58), 732-743 (2012).
- Siczek K., Kuchar M. The Concept of a New Car Shock Absorber with Energy Recuperation. *Journal the archives of automotive engineering*, Vol. 56, pp. 49-61. (2012).
- Li, Z., Zuo, L., Luhrs, G., Lin, L., & Qin, Y. X. Electromagnetic energy-harvesting shock absorbers: design, modeling, and road tests. *IEEE Transactions on vehicular technology*, 62(3), 1065-1074. (2012).
- Lam, A. H. F., & Liao, W. H. Semi-active control of automotive suspension systems with magneto-rheological dampers. *International Journal of Vehicle Design*, 33(1-3), 50-75. (2003).
- Aldair, A. A., & Wang, W. J. The energy regeneration of Electromagnetic energy saving active Suspension in full vehicle with Neurofuzzy controller. *International Journal of Artificial Intelligence & Applications*, 2(2), 32-43. (2011).
- Kertesz, I., Lovas, T., & Barsi, A. Measurement of road roughness by low-cost photogrammetric system. *International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences*, 36(5/C55), 4. (2007).
- González, A., O'brien, E. J., Li, Y. Y., & Cashell, K. The use of vehicle acceleration measurements to estimate road roughness. *Vehicle System Dynamics*, 46(6), 483-499. (2008).
- Ngwangwa, H. M., Heyns, P. S., Labuschagne, F. J. J., & Kululanga, G. K. Reconstruction of road defects and road roughness classification using vehicle responses with artificial neural networks simulation. *Journal of Terramechanics*, 47(2), 97-111. (2010).
- Bucinskas, V., Mitrouchev, P., Sutinyas, E., Sesok, N., Iljin, I., & Morkvenaite-Vilkonciene, I. Evaluation of comfort level and harvested energy in the vehicle using controlled damping. *Energies*, 10(11), 1742 (2017).
- Bucinskas, V. *U.S. Patent Application No. 13/560,985* (2014).

W kierunku jazdy autonomicznej: konstrukcja inteligentnego amortyzatora

Streszczenie: Większość nowoczesnych samochodów jest wyposażona w standardowe układy zawieszenia z hydraulicznymi amortyzatorami. Aktualnie stosowane amortyzatory są niezawodne, jednak nie umożliwiają dalszego rozwoju w odniesieniu do znacznych wartości przyspieszeń drgań w lekkich samochodach o dużych średnicach felg i opon. Artykuł przedstawia nowe możliwości rozwiązań w nowoczesnych układach zawieszenia z kontrolowanym tłumieniem, autonomicznym zasilaniem oraz monitoringiem. Zaproponowane tłumiki zapewniają inteligentne, elektrycznie sterowaną siłę tłumienia. W pracy skupiono się na właściwościach elektrycznych zaproponowanych amortyzatorów cieczowych. Do badań eksperymentalnych wykorzystano opracowany przez autorów prototyp amortyzatora, a eksperymenty przeprowadzono na maszynie uderzeniowej. Pozyskiwanie energii z amortyzatora zrealizowano przy użyciu trzech podobnych prototypów z cieczą z nanocząstkami magnetycznymi na bazie żelaza, rdzeniem z magnesem trwałym i rdzeniem ze stali ferromagnetycznej. Uzyskane wyniki przedstawiono jako uzyskaną energię elektryczną zarówno w układzie z otwartym obwodem, jak i obciążeniem elektrycznym.

Słowa kluczowe: tłumienie, kontrola wibracji, pozyskiwanie energii, systemy mechatroniczne, amortyzator

Andrius Dzedzickis, PhD student

andrius.dzedzickis@vgtu.lt
ORCID: 0000-0002-2665-8829

He was born in Ukmergė, Lithuania in 1989. He received the BS degrees in mechanical engineering from Mechanical faculty of Vilnius Gediminas technical university in 2014. In 2019 he received the PhD. degree in mechanical engineering from Vilnius Gediminas technical university. Now he held position of associated professor at Vilnius Gediminas Technical University, Department of Mechatronics, robotics and digital manufacturing. His current research interest includes dynamics of micro and macro mechatronic systems, robotics, advanced control methods of robotic and mechatronic systems, digital manufacturing.



Tadas Lenkutis, PhD student

tadas.lenkutis@vgtu.lt
ORCID: 0000-0001-8642-4039

He was born in Anykščiai, Lithuania in 1990. He received Master degree in Mechatronics from Mechanical faculty of Vilnius Gediminas technical university in 2015. In 2011–2018 he was working in repair and monitoring of mechatronic systems in various companies. From 2018 he started studying PhD in Mechanical engineering. Now he works at Vilnius Gediminas Technical University, Department of Mechatronics, robotics and digital manufacturing. His current research interest includes smart fluids, energy harvesting from mechanical vibrations and artificial intelligent.



Mantas Makulavičius, BSc

mantas.makulavicius@vgtu.lt
ORCID: 0000-0003-0970-1762

He was born in Alytus in 1996. He obtained Bachelor in Mechatronics at Vilnius Gediminas Technical University (VGTU). He is currently studying MSc in Mechatronics. He has been working at VGTU in Department of Mechatronics, robotics and digital manufacturing since 2018, recently as an engineer at the laboratory of 3D printing and digital manufacturing. His major scientific interests concern with robotics, image recognition, modeling of dynamic systems.



Prof. Vytautas Bučinskas, PhDvytautas.bucinskas@vgtu.lt
ORCID: 0000-0002-2458-7243

He was born in Šiauliai, Lithuania (former USSR), in 1962. He received the Engineer degree in automotive engineering from the Vilnius Civil Engineering Institute, India, in 1985. In 1985 he started as Engineer of work safety in VISI, Lithuania and continues until 1987. Then he started PhD studies in the same institute as well as took position of assistant lecturer. In 1989 he leaves Institute for some business employments and in 2000 start as researcher in the Faculty of Mechanics, dept. of Machine Engineering. In 2002 he joined defended PhD thesis in the field of Theory of Machines and became associated professor in the Department of Machine Engineering, Vilnius Technical University. Since December 2002, he continues as associated professor until 2012, when he gets Professor Position in the same Department. In 2013 Department of Mechatronics and robotics was established and he took steering chair in it. After merging of two Departments, he heads Department of Mechatronics, robotics and digital manufacturing. His current research interests include design of mechatronic systems, dynamical properties of mechatronic systems, energy harvesting from vibrations. Prof. dr. Bučinskas is a Fellow of the Lithuanian Association of Engineering Industry (LINPRA), Lithuanian association of Robotics. Interest in new technologies fosters ideas, which was patented as Lithuanian, European, US and Japanese patents. Now he engaged into two H2020 Exsel Ju projects "3Ccar" and "Autodrive", where autonomous vehicle problems are researched as well as problems of electric mobility. Activities in these projects bringing new ideas of further activities and opens new prospective in cooperation with industry.

Inga Morkvėnaitė-Vilkončienė, PhDinga.morkvenaite-vilkonciene@vgtu.lt
ORCID: 0000-0001-5936-9900

She was born in Pasvalys, Lithuania, in 1979. She received the B.E. degree in electrical engineering from the Kaunas University of Technology, Panevėžys, Lithuania, in 2009, and the Master degree in control engineering from the Kaunas University of Technology, Panevėžys, Lithuania, in 2011. She received PhD degree in chemistry from the Vilnius University, Vilnius, Lithuania, in 2016. She works as a researcher from 2008, started on working with Atomic Force Microscopy, and MEMS based analytical devices. From 2012 she started to work with biologically modified surfaces, such as enzymes and living cells, applying Atomic Force Microscopy and Scanning Electrochemical Microscopy. In 2013, she joined the Department of Electronics Engineering, University of Applied Sciences, as a Lecturer. Since february 2016, she is an Associate Professor in the Department of Mechatronics and Robotics, Vilnius Gediminas Technical University. Her current research interests include different kind scanning microscopies; possibilities to combine several methods of microscopy, in order to achieve different kind of information studying surfaces modified by biological materials and electrical energy harvesting from various processes.